


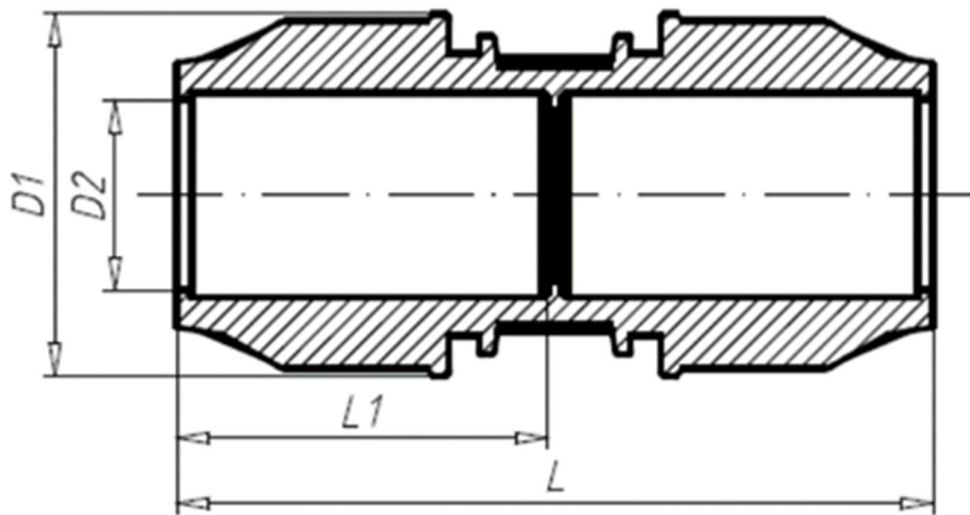

Innendurchmesser (ID)	L	L1	D1	D2
16	89,5	43,5	39,0	17,5
20	106,5	52,0	46,0	22,0
25	113,0	55,0	52,0	27,0
32	144,5	71,0	62,5	33,5
40	163,0	80,0	78,0	41,0
50	188,0	92,5	91,0	51,0
63	220,0	108,0	108,5	65,0
75	263,0	129,5	129,0	77,0
90	325,0	160,0	150,0	91,5
110	357,0	176,0	165,0	100,65

Merkmale:

Anschluss: Kupplung x Kupplung

Material: PP

Zulassung: DVGW/KIWA/WRAS/SVGW

Max. Betriebsdruck: 16 bar

Farbe: schwarz/blau