


# Flotide Sandfilter – Top Mount Typ MFV

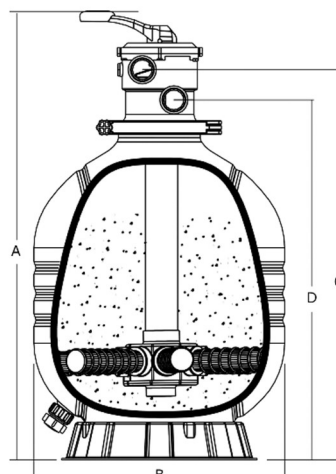

| ANSCHLUSS                    | WERKSTOFF | ARBEITSDRUCK | MAX. TEMP. |
|------------------------------|-----------|--------------|------------|
| Metrisch/Imperial Klebemuffe | HDPE      | 2,8 bar      | 50 °C      |

| TYP   | DURCHMESSER<br>mm | MASS           | MAX DURCH-<br>FLUSS m³/h | SANDMENGE<br>kg | MAX. POOLVOL.<br>m³ | FILTERFLÄCHE<br>m² |
|-------|-------------------|----------------|--------------------------|-----------------|---------------------|--------------------|
| MFV17 | 425               | 50 mm / 1 1/2" | 7                        | 40              | 37.5                | 0.14               |
| MFV20 | 500               | 50 mm / 1 1/2" | 10                       | 70              | 52.5                | 0.2                |
| MFV24 | 600               | 50 mm / 1 1/2" | 14                       | 125             | 71.5                | 0.28               |
| MFV27 | 675               | 63 mm / 2"     | 18                       | 185             | 101.5               | 0.36               |
| MFV31 | 775               | 63 mm / 2"     | 23.5                     | 320             | 123.5               | 0.47               |

## Abmessungen:

| TYP   | A mm | B mm | B Zoll | C mm | D mm | GEWICHT<br>kg |
|-------|------|------|--------|------|------|---------------|
| MFV17 | 816  | 425  | 17     | 695  | 635  | 11            |
| MFV20 | 889  | 500  | 20     | 772  | 712  | 12.8          |
| MFV24 | 980  | 600  | 23     | 860  | 800  | 20            |
| MFV27 | 1133 | 675  | 26     | 976  | 910  | 20.6          |
| MFV31 | 1178 | 775  | 30     | 1021 | 955  | 38.8          |