


Gewindeflansch DIN 2566

Stahl verzinkt

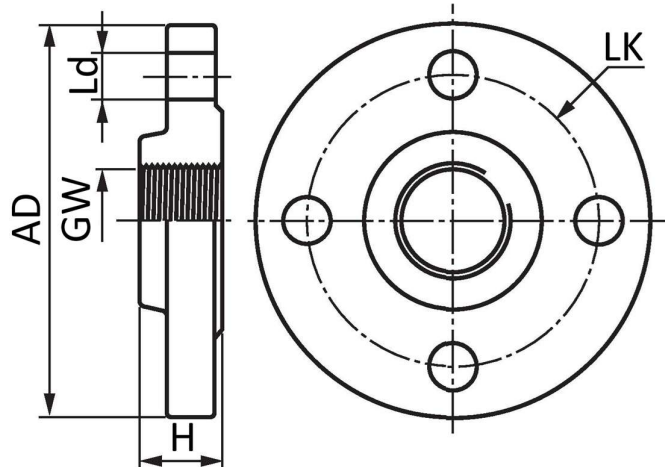

Nenn- weite	Innengewinde GW	Außendurch- messer (AD)	Höhe (H)	Löcher	Lochdurch- messer (Ld)	Lochkreis (LK)
DN 10	3/8"	90	20	4	14	60
DN 15	1/2"	95	20	4	14	65
DN 20	3/4"	105	24	4	14	75
DN 25	1"	115	24	4	14	85
DN 32	1 1/4"	140	26	4	18	100
DN 40	1 1/2"	150	26	4	18	110
DN 50	2"	165	28	4	18	125
DN 65	2 1/2"	185	32	4	18	145
DN 80	3"	200	34	8	18	160
DN 100	4"	220	38	8	18	180
DN 125	5"	250	40	8	18	210
DN 150	6"	285	44	8	22	240

Merkmale:

- Anschluss: DIN Flansch x Innengewinde
- Material: Stahl verzinkt
- Farbe: grau
- Arbeitstemperatur -20°C bis 200°C
- Betriebsdruck (max.): PN 16 bar
- Norm: DIN 2566